

# Group 5 Housing

## Catalog # 47350

All 304 Stainless Steel Construction.

Approx. Dimensions are 31" wide x 38" long and 50" tall.  
(36" tall interior of cage)

Minimum 8.0 square feet of floor space available.

A fixed cage front.

An 11" x 15" Guillotine Sliding Animal Door is provided with a Guarded Spring Loaded Latch mechanism. The door is captive, and cannot be removed.

Squeeze Back glides in Tivar Hot Plastic Bearing Blocks to eliminate metal to metal contact, Squeeze Ratcheting Bars also glide in same bearing blocks. Squeeze can latch in various forward positions. Squeeze Handles are made of 1/2" dia. SS Rods.

Squeeze: 1/2" dia. Perimeter rod with a 1" x 3" x .162 ga. Vertical Welded Wire configuration.

Wire Panels: 1" x 3" x .162ga. Vertical Welded Wire configuration w/ 3/8" dia. perimeter rod.

Floor Wire: 1" x 1" x .162 ga. Welded Wire configuration with a 3/8" dia. perimeter rod.

Frame of Cage: 1-1/2" x 1-1/2" x .125 ga. Formed Angles.

A SS 16 ga. Removable Waste Pan is provided with a lockable Pan Door.

Base Frame made of 1-1/2" x 1-1/2" SS Box Tube.

Heavy Duty Watering System with Lixit , Quick Disconnect and Drain provided.


Supported on 5" SS Locking Casters.

Linear Perches are provided.

Self-storing Horizontal Divider Panels on both sides of cage to pair with existing cages.

Custom Designed to pair with existing Carter2 Systems cages.

Wall Bumper provided to protect room walls and can double as a handle.

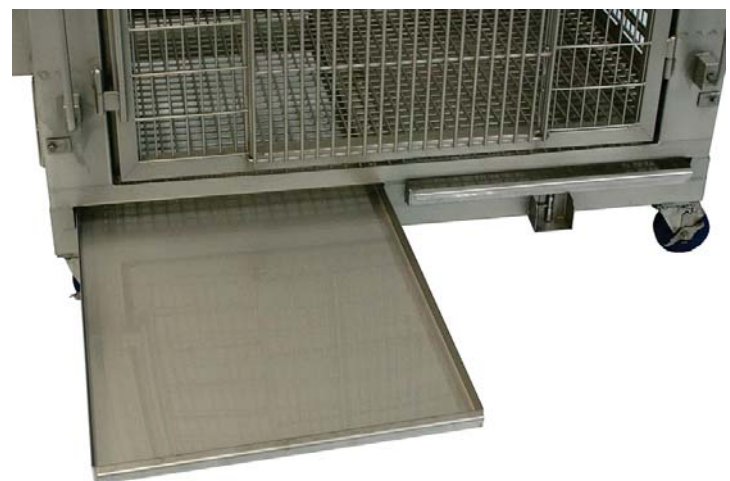

Cages are Bead Blasted to a Matte Finish.